


CLASS "A" HIGH EARLY STRENGTH CONCRETE TO MATCH EXISTING THICKNESS (MIN. 8")

HOOK BOLTS-TYP. (PER DETAIL SD-R-5)

SAWCUT (TYP.)

LIMIT OF PAVEMENT PATCH

5.0' MIN.

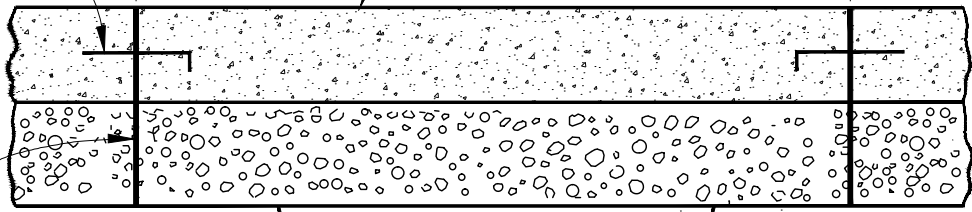

21-A OR 22-A GRAVEL TO MATCH EXISTING (MIN. 8") COMPACTED TO 98% MAXIMUM DENSITY

CLASS II GRANULAR MATERIAL COMPACTED TO 95% MAXIMUM DENSITY PER CITY OF ANN ARBOR STANDARDS (SEE DIVISION IV REGARDING BACKFILL FOR PVC SEWERS)

MINIMUM TRENCH WIDTH PER CITY OF ANN ARBOR STANDARDS.

MINIMUM PIPE BEDDING PER CITY OF ANN ARBOR SPECIFICATIONS (4" MIN.)

NOTE: REMOVE AND REPLACE HALF OR FULL PAVEMENT PANEL(S)

NOTE: TRENCH DETAILS SHOW TYPE OF BACKFILL AND SURFACE RESTORATION ONLY.

NOTE: ALL TRENCHING TO CONFORM TO ALL APPLICABLE M.I.O.S.H.A. STANDARDS.

NOTE: DENSITY AND CONCRETE TESTING PER CITY OF ANN ARBOR SPECIFICATIONS.

HOOK BOLT REFERENCE CORRECTED					1	NCF	CSS	1-31-94
REVISIONS		REV. NO.	DR. BY	CH. BY	DATE			
<b>PUBLIC SERVICES DEPARTMENT</b>								
<b>CITY OF ANN ARBOR</b>								
UTILITY TRENCH-TYPE III (UNDER CONCRETE PAVEMENT)								
DR. BY	DF	CH. BY	CSS	DRAWING NO.				
SCALE	NONE	DATE	11-6-92	SD-TD-3				
INCH	0  1			SHEET NO. _____ OF _____				